



- The latest LED technology with a high luminous efficacy and a long service life
- Extremely high luminaire efficacy
- Luminous flux after 100,000 h still 90% of the starting luminous flux
- Optionally with DALI for controlling and monitoring the luminaire
- Optionally addressable for direct actuation of a common battery system

## MY R. STAHL 6002D



The linear luminaire with Series 6002/4 LED is ideal for lighting surfaces at a mounting height of up to 10 m. It can also be used to illuminate equipment and objects, both inside and outside. The pole mounting sleeve accessory can be used to easily mount the luminaire on poles. Optionally, the luminaire can be equipped with addressable equipment. It can be used to control and monitor the luminaire for the common battery systems.

## Technical Data

## Explosion Protection

|                                 |                                       |
|---------------------------------|---------------------------------------|
| Ex version                      | Yes                                   |
| Application range (zones)       | 1, 2, 21, 22                          |
| IECEX gas certificate           | IECEX IBE 14.0035                     |
| IECEX gas explosion protection  | Ex db eb ib op is IIC T4 Gb           |
| IECEX dust certificate          | IECEX IBE 14.0035                     |
| IECEX dust explosion protection | Ex tb op is IIIC T100 °C Db           |
| ATEX gas certificate            | IBExU 14ATEX1088                      |
| ATEX gas explosion protection   | Ex II 2 G Ex db eb ib op is IIC T4 Gb |
| ATEX dust certificate           | IBExU 14ATEX1088                      |
| ATEX dust explosion protection  | Ex II 2 D Ex tb op is IIIC T100 °C Db |
| Certificates and approvals      | ATEX<br>IECEX<br>UKEX                 |
| Certificates                    | ATEX (IBE), IECEX (IBE), India (PESO) |
| Ship approval                   | DNV                                   |
| Declaration of conformity       | ATEX (EUK)                            |

## Electrical Data

|                              |               |
|------------------------------|---------------|
| Rated operational voltage AC | 110 ... 240 V |
| Rated operational voltage DC | 110 ... 250 V |
| Frequency range              | 50 – 60Hz     |

## Lighting Data

|                    |                                |
|--------------------|--------------------------------|
| Number of lamps    | 1                              |
| Lamp wattage       | 49 W                           |
| Lamp               | LED                            |
| Light colour       | 6500 K – daylight white        |
| Light distribution | 120°x120° with diffusing glass |

**Lighting Data**

|                    |          |
|--------------------|----------|
| Luminaire efficacy | 153 lm/W |
| Luminous flux      | 7410 lm  |
| Colour rendering   | ≥ 90     |
| Colour temperature | 6500 K   |

**Ambient Conditions**

|                     |                                                                                                          |
|---------------------|----------------------------------------------------------------------------------------------------------|
| Ambient temperature | -20 °C ... 50 °C Note: Through wiring Max. 3x16 A<br>-20 °C ... 60 °C Note: Through wiring 2 Max. 3x10 A |
|---------------------|----------------------------------------------------------------------------------------------------------|

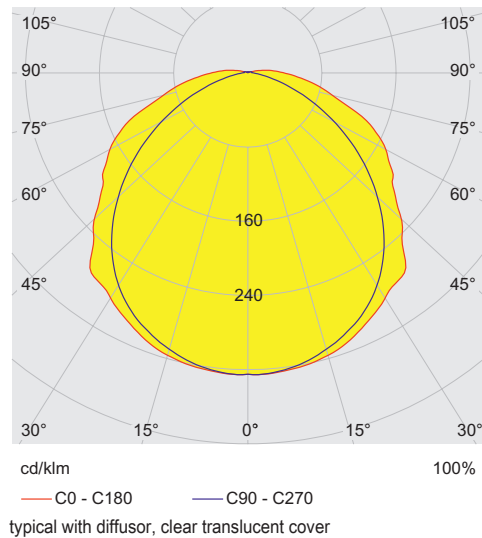
**Mechanical Data**

|                                           |                                         |
|-------------------------------------------|-----------------------------------------|
| Version                                   | Standard                                |
| Translucent cover                         | Clear                                   |
| IP degree of protection (IEC 60598)       | IP66                                    |
| Enclosure material                        | Polyester resin, Glass fibre reinforced |
| Enclosure colour                          | Light grey (RAL 7035)                   |
| Diffuser                                  | With diffuser                           |
| Sealing material                          | Silicone                                |
| Silicone-free content                     | Contains silicone                       |
| Translucent cover material                | Polycarbonate                           |
| Installed terminal strip                  | PE + N + L1 + L2 + L3                   |
| Max. solid connection terminals           | 6 mm <sup>2</sup>                       |
| Max. finely stranded connection terminals | 4 mm <sup>2</sup>                       |
| Type of connection cable                  | Finely stranded<br>Solid                |
| Size                                      | 6                                       |
| Width                                     | 184 mm                                  |
| Height                                    | 125 mm                                  |
| Length                                    | 1610 mm                                 |
| Impact strength (IEC 62262)               | IK10                                    |
| Weight                                    | 8 kg                                    |
| Weight                                    | 17.64 lb                                |
| Disconnection of the luminaire            | Yes                                     |


**Components**

|                          |                                       |
|--------------------------|---------------------------------------|
| Threaded plate           | 2x SS430 stainless steel              |
| Ballast                  | 6045/311-110-10                       |
| Through wiring           | With 5 conductors 2.5 mm <sup>2</sup> |
| Drilled holes            | 3 x M20                               |
| Cable glands and entries | can be ordered as an accessory        |
| Stopping plugs           | Can be ordered as accessories         |
| Accessories              | without                               |










#### Light Distribution Curves



#### Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

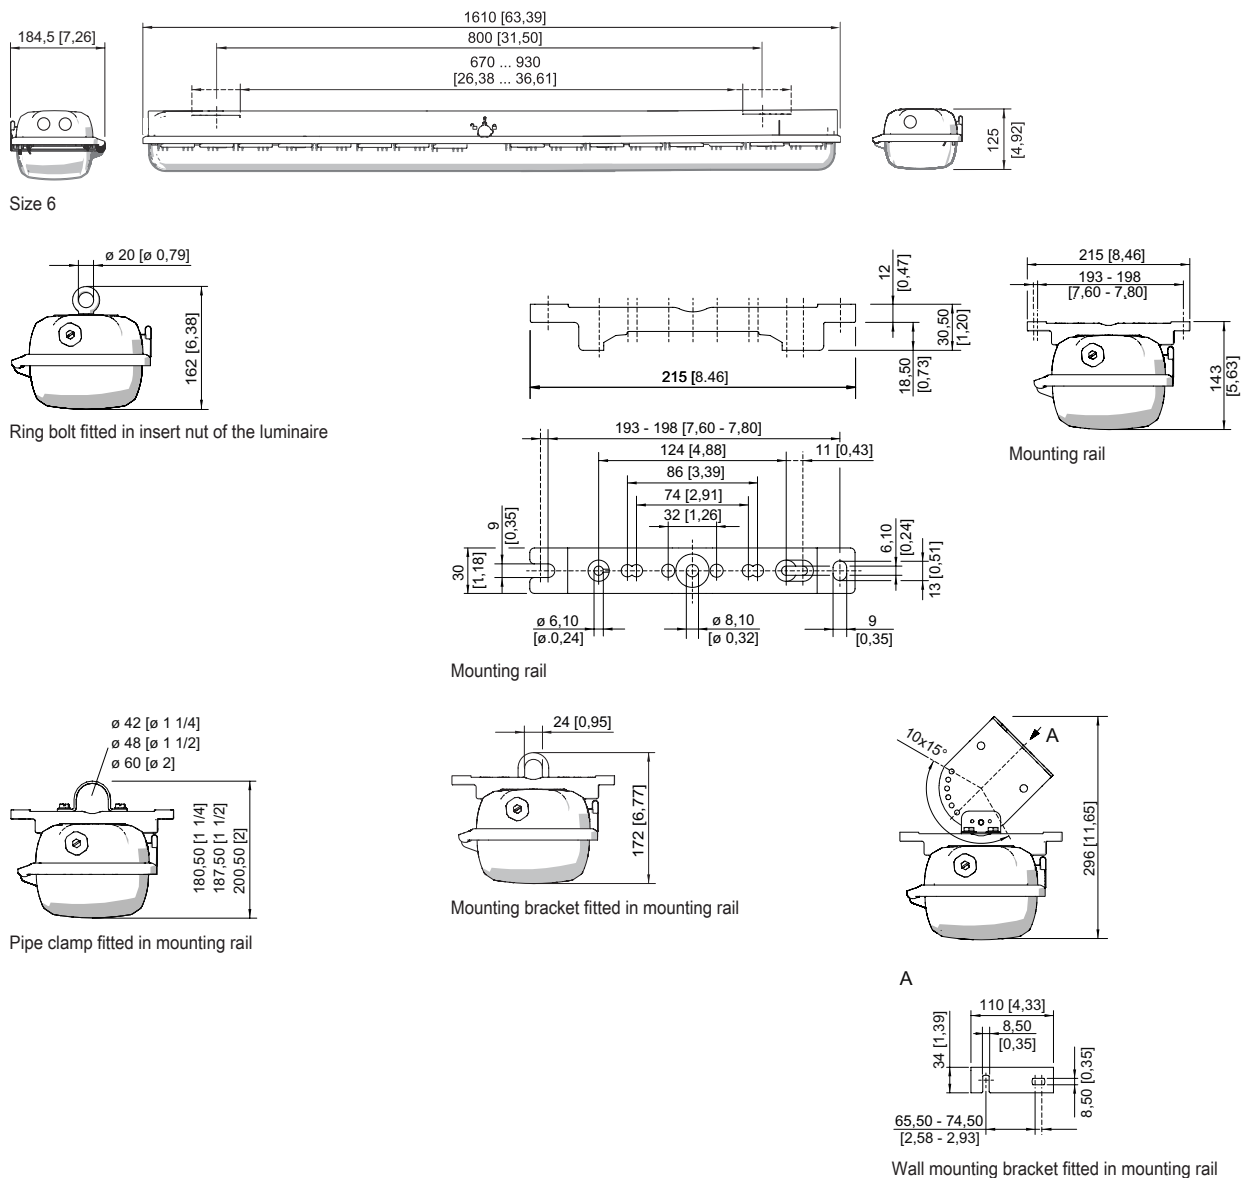

#### Accessories

| Box spanner                                                                        |                                                                                                                                                     | Art. No. |
|------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|----------|
|    | M8 / A/F 13;<br>For actuating the central lock                                                                                                      | 222430   |
| Breather                                                                           |                                                                                                                                                     | Art. No. |
|    | Thread: M25 x 1.5 (20 pieces); without jam nut                                                                                                      | 285780   |
|    | Thread: M25 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut                                         | 296608   |
|   | M25 x 1.5 in order to avoid condensate formation                                                                                                    | 115738   |
| Ceiling and wall mounting bracket                                                  |                                                                                                                                                     | Art. No. |
|  | mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair                | 222827   |
| Holder for translucent cover                                                       |                                                                                                                                                     | Art. No. |
|  | The fall prevention system for the light fitting cover prevents the light fitting cover from falling accidentally when the light fitting is opened. | 226791   |
| Mounting bracket                                                                   |                                                                                                                                                     | Art. No. |
|  | mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair                                                                  | 222456   |
| Mounting rail                                                                      |                                                                                                                                                     | Art. No. |
|  | for a variable mounting distance; 1 pair                                                                                                            | 222826   |
| Pipe clamp                                                                         |                                                                                                                                                     | Art. No. |
|  | R 1 1/2"; with mounting rail for a variable mounting distance; material: stainless steel; 1 pair                                                    | 222459   |
|                                                                                    | R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair                                                    | 222458   |
|                                                                                    | R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair                                                        | 222460   |

# Lighting

Linear luminaire With LED


GRP

6002/4168-0201-152-2220-22-8650 Art. No. 276340



## Protection against accidental contact

Art. No.



The protection against accidental contact prevents maintenance technicians and electrical installers from accidentally touching conductive parts. The degree of protection is increased to IP20 when the protection against accidental contact is used.

283153

## Ring bolt

Art. No.




M8, direct mounting in insert nuts; 1 pair

115736

## Spare Parts

### Contact element

Art. No.




8080/1-3-L 2 NC contact element

132527

### Cover

Art. No.



for luminaire size 6

222429

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.