

Operating and Monitoring Systems

KVM system SERIES 600

Device platform MANTA

PM IT-677-DVI3-MM

STAHL



- KVM system for panel mounting, 24" display, Full HD 1920 x 1080
- For installation in safe areas
- Optional resistive glass or foil touch screen
- Data transmission via multi-mode fibre optic up to 550 m

MY R. STAHL MANTAKVMP-MA

The PM IT-677-DVI3 HMI series includes KVM systems for panel mounting in safe areas. Their brilliant 24" WU widescreen displays with a resolution of 1920 x 1080 pixels (format 16:9), are available with or without touch screen. Country-specific keyboards, pointer instruments and RFID and barcode scanners are useful accessories making work easier and extending functionality. Data is transmitted via multi-mode fibre optic up to 550 m.

Technical Data

General

Series	MANTA KVM Panel mount devices
Product description	24" KVM system
HMI type	Panel-mount device
Technology	Remote HMI KVM

Explosion Protection

Application range (zones)	Non-Ex
---------------------------	--------

Electrical Data

Power supply	230 VAC
Rated operational voltage AC	230 V
Voltage range AC	100 – 240 V
Frequency range	50 – 60 Hz
Power consumption AC 1	1 A
Protection fuse AC	5 AT
Rated operational power	typ. 50 W / 100 W at O30 / max. 150 W (typ. 170 BTU / 341 BTU at O30 / max. 510 BTU)
Transfer technology	KVM-DVI3
Operating system	independent
Language support	User menu: English
Ethernet / Data	FO multi-mode
Data cable	50/125 µm FO cable oder 62.5/125 µm FO cable
Data cable length	max. 550 m, with 50 µm FO cable max. 300 m, with 62.5 µm FO cable
Interface medium	Multi-mode optical cable

Electrical Data

Interface USB	2 x USB (Hub) 1 x USB (Root) 2 x USB (Hub) (keyboard, pointing device)
Interface serial	1 x RS-232
Interface reader note	RFID reader, support of the following standards: MIFARE Classic, DESFire, DESFire EV1, LEGIC prime and advant, NFC, INSIDE Secure, Sony FeliCa, ISO 14443A & 15693 1D/2D Barcode scanner: support of all common 1D/2D codes, wired or Bluetooth
Interface audio	1 x Audio Line in / out
WLAN	optional via USB
Connection compartment	Power supply direct in integrated connection box
Connections	via standard plug
Plug version FO	LC duplex socket
Plug version USB	USB-A connector
Max. input voltage U_m	250 VAC

Display

Display version	TFT Color display
Display version 2	16.7 million colours
Display size inch	24
Display size centimetres	61
Display resolution	1920 x 1080, 1680 x 1080, 1280 x 1024
Total pixels	1920 x 1080
Display dimensions	16:9
Display brightness	300 cd/m ²
Display contrast	1000:1
Display viewing angle horizontal	178°
Display viewing angle vertical	170°
Touchscreen	optional, resistive glass or foil touchscreen
Touchscreen technology	5-wire glass or foil touch
Touchscreen activation	Foil touch: low activation pressure (0.1 to max. 1 N) Glass touch: medium activation pressure (1.8 to max. 2.5 N)
Touchscreen input method	Finger, gloved finger or stylus
Touchscreen durability	Foil touch: polyester foil is easily scratched, with high pressure the spacer dots could be damaged Glass touch: Satisfactory, but glass is not hardened, with high pressure the spacer dots could be damaged
Touch screen scratch hardness MoHS	Foil touch: - Glass touch: >5
Touchscreen scratch hardness pencil test ISO15184	Foil touch: 3H Glass touch: 9H
Touchscreen transmissivity / optic	Foil touch: slightly milky effect due to foil Glass touch: very good
Touchscreen surface contaminants	unaffected
Touchscreen abrasive resistance	36 million activations with a silicone rubber finger R8, 250 g for 2 activations per second
Backlight	LED Technology
Backlight service life	50000 h at +20 °C

Operating and Monitoring Systems

KVM system SERIES 600

Device platform MANTA

PM IT-677-DVI3-MM

STAHL

Display

Front plate (display)	Aluminium and no touchscreen: glass foil touchscreen: polyester glass touchscreen: thin glass
-----------------------	--

Ambient Conditions

Ambient temperature operation	-20 °C ... +60 °C
Ambient temperature operation 1	-30 °C ... +60 °C with heater version O30
Storage temperature	-30 °C ... +70 °C
Cold start temperature	-10 °C
Temperature note 1	The O30 version is only available for the AC version devices !
Temperature note 2	Operating temperature +60 °C for a maximum of 5 h, for constant operation (24/7) +50 °C.
Temperature note 3	Cold start temperature: If the HMI device is switched on at a temperature below -10 °C the display will need a certain amount of time to warm up until everything is clearly visible. Depending on how low the temperature is, this process may last up to 3 hours.
Relative humidity	10 to 90 % at +40 °C, non-condensing


Mechanical Data

Dimensions (WxHxD)	660 mm x 475 mm x 110 mm
Cut-out (WxH)	615 mm x 435 mm (+/- 0.5 mm)
Wall thickness	≤ 5 mm
Depth of cut-out	110 mm
Mounting position	vertical or horizontal
Material front	Aluminium
Material back	Steel
Ingress protection	IP66
IP enclosure front	IP66
IP enclosure back	IP20
Weight	10 kg

Mounting / Installation

Mounting option	Front installation
-----------------	--------------------

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

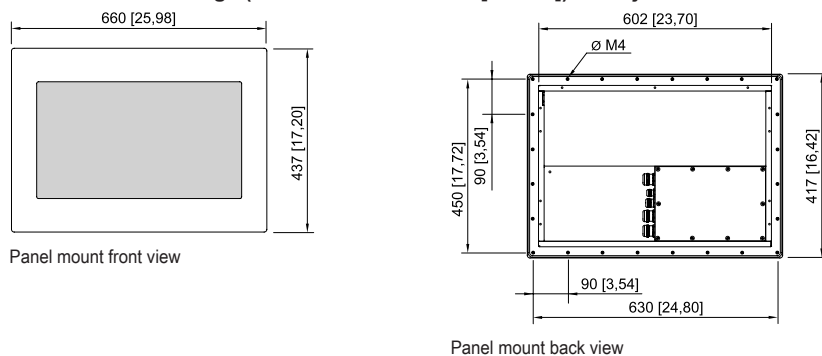

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.