

8146/5052-C814 Art. No. 136137



- Clearly visible red (RAL 3000) enclosure made from glass fibre reinforced polyester resin
- Three versions with manual or automatic alarm triggering and shutdown via pushbutton or key
- Short-circuit protection and open-circuit monitoring possible by retrofitting a Series 8208 resistance module

MY R. STAHL 8146G



With the R. STAHL Series 8146/5052 fire alarm stations, you can manually trigger alarms in hazardous areas. Smash the glass pane using the emergency hammer attached to the side and trigger the alarm using the button. The alarms are available in three different variants for triggering and disconnecting the alarm.


Technical Data

Explosion Protection	
Ex version	Yes
Application range (zones)	1, 2, 21, 22
IECEEx gas certificate	IECEEx PTB 06.0025
IECEX gas certificate	IECEEx PTB 06.0025
IECEEx gas explosion protection	Ex de IIC T6 Gb
IECEEx dust certificate	IECEEx PTB 06.0025
IECEEx dust explosion protection	Ex tD T80 °C
ATEX gas certificate	PTB 01 ATEX 1105
ATEX gas certificate	PTB 01 ATEX 1105
ATEX gas explosion protection	Ex II 2 G Ex de IIC T6 Gb
ATEX dust certificate	PTB 01 ATEX 1105
ATEX dust explosion protection	Ex II 2 D Ex tD T80 °C
Certificates	ATEX (PTB)
Ambient Conditions	
Ambient temperature	-40 °C ... 60 °C
Mechanical Data	
Version	Preloaded mushroom pushbutton
Degree of protection (IP)	IP66
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Red (RAL 3000)
Clamping range	7-17 mm
Max. finely stranded connection terminals	2.5 mm ²
Clamping range	7 ... 17 mm
Type of connection cable	Finely stranded
Width	170 mm
Height	131 mm
Length	230 mm


8146/5052-C814 Art. No. 136137

Mechanical Data	
Contacts	1 NC + 1 NO
Weight	2.27 kg
Weight	5 lb
Components	
Cable glands and entries	1 x M25 x 1.5

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

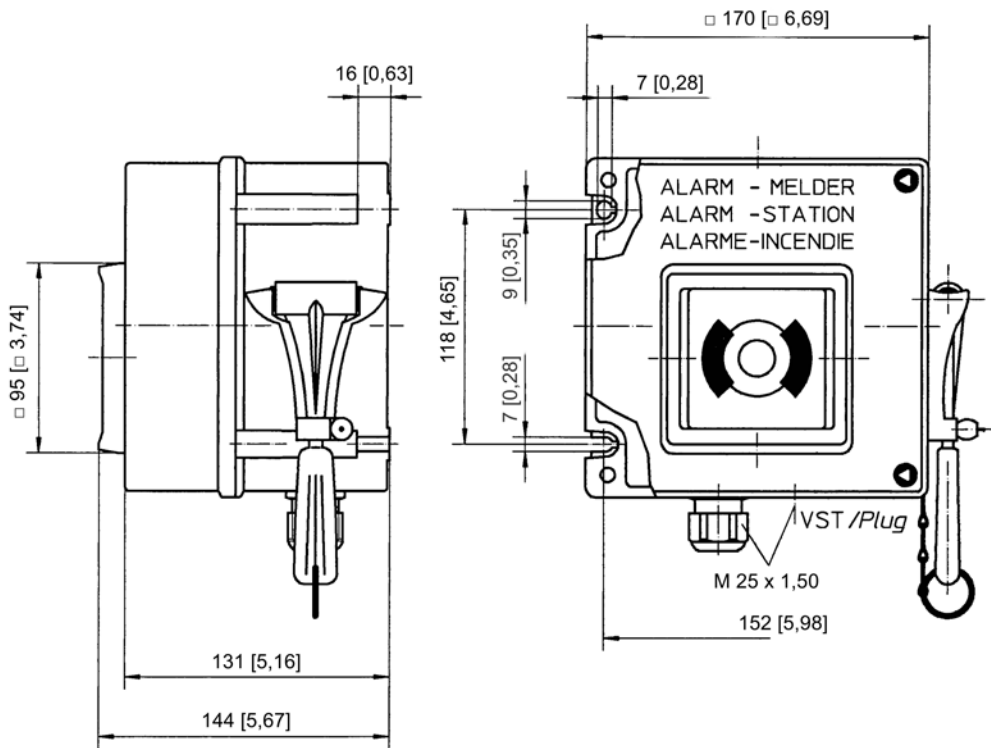


Accessories

Emergency hammer		Art. No.
	for breaking the glass pane in case of emergency	163079
Adhesive label		Art. No.
	Label 8146 "FIRE BRIGADE"	137569
Triangular socket wrench		Art. No.
	8198/1-M4 Triangul. socket key	140482

8146/5052-C814 Art. No. 136137

Resistor module

Art. No.



Retrofit kit in the control unit 8208 equipped with 2 resistors according to customer request;
e.g. 3.3 kΩ open-circuit monitoring
4.7 kΩ short-circuit protection

157015

Spare Parts

Inspection window

Art. No.



Inspection window 8603 size 3 87x87x2

155971

Spare key

Art. No.



Closing MS1

107109

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.