

8146/5075 Art. No. 136216



- Continuous monitoring of correct grounding
- Robust design
- Plastic enclosure (IP66)
- One potential-free change-over contact for signalling to the distributed control system or external signalling devices
- Insulated suspension point
- For use up to SIL 2 (IEC 61508)

MY R. STAHL 8146H



The grounding monitoring device ensures that tank containers, barrels, road tankers, rail vehicles and IBCs are electrostatically grounded while combustible liquids and powders are being loaded.

The device simultaneously monitors electrostatic grounding.

This guarantees that an electrostatic charge remains at a safe level and that there is no explosion hazard caused by the uncontrolled discharge of this energy.

Technical Data

Explosion Protection

Application range (zones)	1, 2, 21, 22
Ex interface zone	1, 2, 21
IECEX gas certificate	IECEX PTB 06.0090
IECEX gas explosion protection	Ex db eb [ia Ga] IIC T4 Gb
IECEX dust certificate	IECEX PTB 06.0090
IECEX dust explosion protection	Ex tb [ia Da] IIIC T80 °C Db
ATEX gas certificate	PTB 01 ATEX 1024
ATEX gas explosion protection	II 2(1) G Ex db eb [ia Ga] IIC T4 Gb
ATEX dust certificate	PTB 01 ATEX 1024
ATEX dust explosion protection	II 2 (1) D Ex tb [ia Da] IIIC T80 °C Db
Certificates	ATEX (PTB), Brazil (ULB), China (NEPSI), IECEx (PTB), India (PESO), SIL (exida)
Declaration of conformity	ATEX (EUK), China (CCC)

Safety Data



Max. voltage U_o	9.6 V
Max. current I_o	10 mA
Max. power P_o	24 mW
Max. permissible external capacity C_o for IIC	3.6 μ F
Max. permissible external inductance L_o for IIC	350 mH
Internal capacitance	2.42 nF
Internal inductance	Negligible
Safety-related max. voltage	253 V
Test report	Exida STAHL 11/07-089 R022
Safe state	Relay de-energised/no release
Safe failure fraction (SFF)	73%

8146/5075 Art. No. 136216


PFD _{AVG} at T _[Proof]	T _[Proof]	1 year	2 years	5 years
	PFD _{AVG}	4.14 x 10 ⁻⁴	7.9 x 10 ⁻⁴	1.92 x 10 ⁻³
Electrical Data				
Number of channels	1			
Frequency range	48 – 62Hz			
Auxiliary Power				
Nominal voltage range AC	96 – 253 V			
Nominal current	27 mA			
Power consumption	3 W			
Output				
Limit contact	Change-over contact			
Min. output load condition	12 V / 100 µA			
Max. output DC load condition	250 V / 2 A			
Max. output AC load condition	250 V / 4 A			
Output switching capacity	50 W / 1000 VA			
Ambient Conditions				
Ambient temperature	-20 °C ... 55 °C			
Ambient temperature	-4°F ... +131°F			
Storage temperature	-40 °C ... 80 °C			
Storage temperature	-40°F ... +176°F			
Use at the height of	< 2000 m			
Max. operating altitude	2000 m			
Mechanical Data				
Degree of protection (IP)	IP66			
Enclosure material	Glass fibre reinforced polyester resin			
Silicone-free	No			
Terminal range of cable glands	4 – 13 mm			
Cable connection terminal area, inches	0.15 – 0.51 in			
Width	374 mm			
Width, inches	14.72 in			
Height	230 mm			
Height in inches	9.06 in			
Depth	190 mm			
Mounting depth in inches	7.48 in			
Weight	5.8 kg			
Weight	12.79 lb			
Connection		grey and green-yellow	blue	
	Single-wire connection			
	- rigid	0.2 to 6 mm²	0.2 to 4 mm²	
	- flexible	0.2 to 4 mm²	0.2 to 2.5 mm²	
	- flexible with core end sleeves with plastic sleeve	0.25 to 2.5 mm²	0.25 to 1.5 mm²	
	- flexible with core end sleeves without plastic sleeve	0.25 to 4 mm²	0.25 to 2.5 mm²	

8146/5075 Art. No. 136216

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

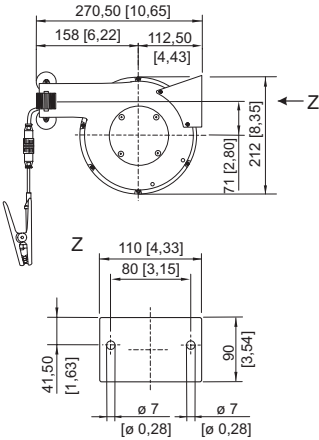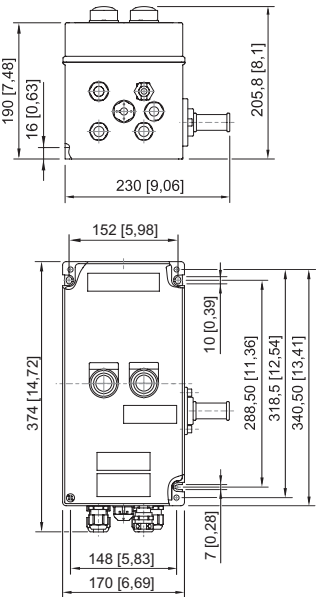


Grounding clamp with automatic retractor for cable
Item no. 247660

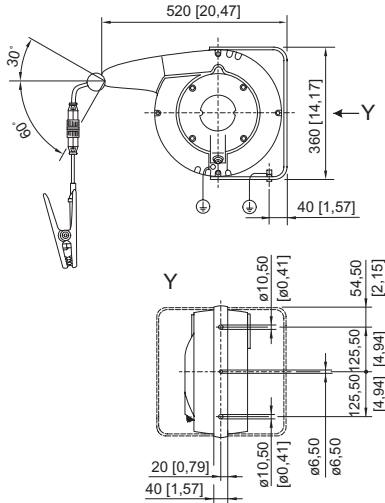

Grounding clamp with automatic retractor for cable
Item no. 247671

Type 8146/5075, 8146/5-V73

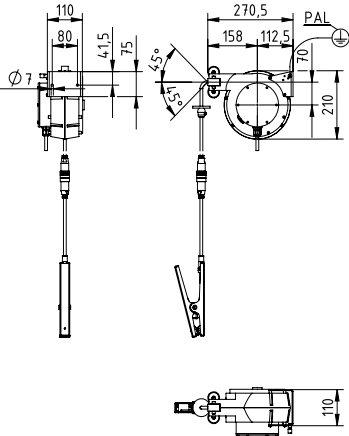

Grounding clamp with automatic retractor for cable
Item no. 269915

Accessories

Grounding clamp with cable



10 m oil- and petrol-resistant cable with robust, ergonomic grounding clamp made from stainless steel, and fast-action plug
Installation in Zone 1, IIC, T6; Zone 21, IIIC, 135 °C
Temperature range: -40 °C to +70 °C
Certificates: ATEX, IECEx

Art. No.

247673

8146/5075 Art. No. 136216

Grounding clamp with spiral cable

Art. No.



10 m oil- and petrol-resistant spiral cable with robust, ergonomic grounding clamp made from stainless steel, and fast-action plug
Installation in Zone 1, IIC, T6; Zone 21, IIIC, 135 °C
Temperature range: -40 °C to +70 °C
Certificates: ATEX, IECEx

247674

5 m oil- and petrol-resistant spiral cable with robust, ergonomic grounding clamp made from stainless steel, and fast-action plug
Installation in Zone 1, IIC, T6; Zone 21, IIIC, 135 °C
Temperature range: -40 °C to +70 °C
Certificates: ATEX, IECEx

247672

Grounding clamp with automatic retractor for cable

Art. No.



Self retracting reel with 20 m oil- and petrol-resistant cable with robust, ergonomic grounding clamp made from stainless steel, and fast-action plug, aluminium enclosure, protected cable duct with stopper
Installation in Zone 1, IIC, T6; Zone 21, IIIC, 135 °C
Temperature range: -40 °C to +70 °C
Degree of protection (IP): IP43
Certificates: ATEX, IECEx

247671



Self retracting reel with 12 m oil- and petrol-resistant cable with robust, ergonomic grounding clamp made from stainless steel, and fast-action plug, aluminium enclosure, protected cable duct with stopper
Installation in Zone 1, IIC, T6; Zone 21, IIIC, 135 °C
Temperature range: -40 °C to +70 °C
Degree of protection (IP): IP42
Certificates: ATEX, IECEx

269915



Self retracting reel with 9 m oil- and petrol-resistant cable with robust, ergonomic grounding clamp made from stainless steel, and fast-action plug, plastic enclosure
Roofing must be provided when installing the unit outside.

Installation in Zone 1, IIC, T6; Zone 21, IIIC, 135 °C
Temperature range: -20 °C to +70 °C
Degree of protection (IP): IP42
Certificates: ATEX, IECEx

247660

Spare Parts

Grounding clamp with fast-action plug

Art. No.



Robust, ergonomic grounding clamp with 150 mm cable and fast-action plug
Spare part for self retracting reels (247660, 269915 and 247671), cable and spiral cable

247675

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.