




- Cost- and space-saving system for HART communication
- Simple mounting on a DIN rail

MY R. STAHL 9196A

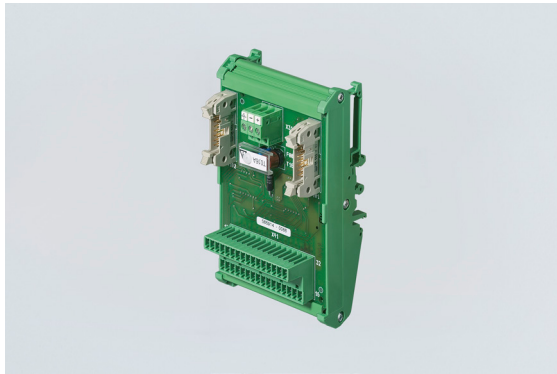

Used in combination with the HART multiplexer (9192), the Series 9196 HART termination board enables the transmission of data using the HART protocol between field devices and an asset management system. The boards are very easy to install on DIN rails and can process 4 to 20 mA signals with HART FSK. If Ex i separation is necessary, this will require separate Ex i isolators.

Technical Data

Explosion Protection	
Application range (zones)	2
IECEX gas certificate	IECEX BVS 10.0042 X
IECEX gas explosion protection	Ex ec IIC T4 Gc
ATEX gas certificate	BVS 03 ATEX E 213 X
ATEX gas explosion protection	Ex II 3 G Ex ec IIC T4 Gc
FMus certificate	FM16US0122X
cFM certificate	FM16CA0067X
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, Group IIC T4 at Ta = 70°C See Doc. 91 926 01 31 1
Certificates	ATEX (BVS), Brazil (ULB), Canada (FM), China (NEPSI), IECEX (BVS), India (PESO), SIL (exida), USA (FM)
Ship approval	CCS, EU RO MR (DNV)
Declaration of conformity	ATEX (EUK), China (CCC)
Installation	In Zone 2, Division 2 and safe areas
Further information	See relevant certificate and operating instructions
Electrical Data	
Type of signal	AI, AO
Number of channels	16
HART-multiplexer connection	Yes
Connection isolators / Non-Ex field devices	Via pluggable terminal; connected to the field device/automation system in parallel; input or output
Auxiliary Power	
Auxiliary power	24 V DC
Nominal voltage	24 V DC
Auxiliary power voltage range	19 ... 31.2 V

Auxiliary Power

Residual ripple	< 3.6 Vss
Polarity reversal protection	Yes

Output

Application	2-, 3- or 4-conductor, Transmitter, positioner
-------------	--

Ambient Conditions

Ambient temperature	-20 °C ... +70 °C
Ambient temperature	-4°F ... +158°F
Note	"Installation conditions influence the ambient temperature. Please observe the 'Cabinet installation guide'."
Storage temperature	-40 °C ... +80 °C
Storage temperature	-40°F ... +176°F
Maximum relative humidity	95%
Use at the height of	< 2000 m
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 For use in industrial areas; NAMUR NE 21



Mechanical Data


Degree of protection (IP)	IP00
Fire resistance (UL 94)	V0
Enclosure material	Polyamide
Width	80 mm
Width, inches	3.15 in
Height	70 mm
Height in inches	2.76 in
Length	125 mm
Length in inches	4.92 in
Weight	150 g
Weight	0.33 lb

Mounting / Installation

Mounting type	DIN rail
Mounting orientation	Vertical
Connection type	Screw terminal
Min. rigid conductor cross section	0.14 mm ²
Max. rigid conductor cross section	1.5 mm ²
Min. flex conductor cross section	0.14 mm ²
Max. flex conductor cross section	1.5 mm ²
Connection cross-section AWG	16 ... 26


Technical Drawings – Subject to Alterations

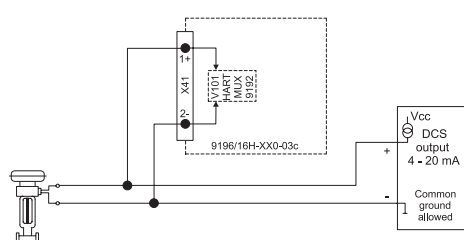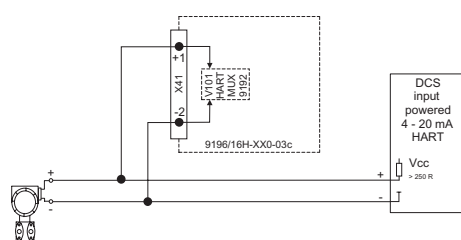

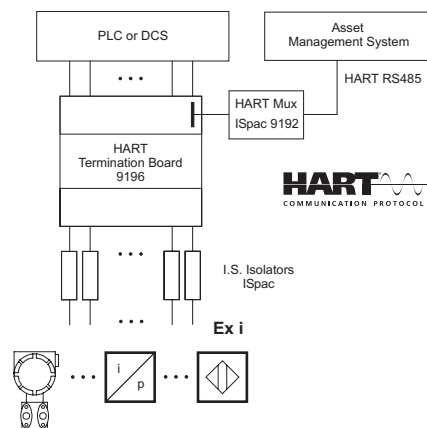

System configuration

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

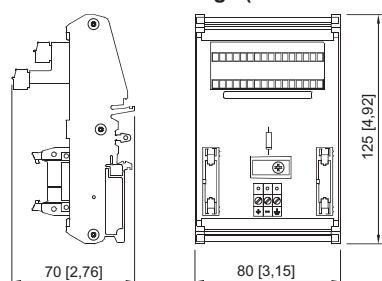

HART termination board type 9196/16H-XX0-03c

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.