

8510/122-06-601-00 Art. No. 165531



- Relay module for installation in Ex e enclosures
- Isolator system for process automation
- Connecting sensors, actuators and transmitters

MY R. STAHL 8510W



Series 8510 Ex i relay modules are used as an isolator system for process automation and for connecting sensors, actuators and transmitters. They are installed in Ex e enclosures. Outputs and auxiliary power are galvanically separated from one another.

Technical Data

Explosion Protection

Application range (zones)	1, 2
IECEX gas certificate	IECEX BVS 07.0029U
IECEX gas explosion protection	Ex de IIC
IECEX firedamp certificate	IECEX BVS 07.0029U
IECEX firedamp protection	Ex de I
ATEX gas certificate	DMT 00 ATEX E 073 U
ATEX gas explosion protection	Ex II 2 G Ex de IIC
ATEX firedamp certificate	DMT 00 ATEX E 073 U
ATEX firedamp protection	Ex I M2 Ex de I
Certificates	ATEX (BVS), Brazil (ULB), Canada (FM), China (CQST), IECEX (BVS), USA (FM)

Safety Data

Max. voltage U_o	30 V
Max. current I_o	150 mA
Max. power P_o	1.3 mW

Ambient Conditions

Ambient temperature	-20 °C ... +60 °C
---------------------	-------------------

Mechanical Data


Degree of protection (IP)	IP20
Enclosure material	Epoxy resin
Min. connection terminals	1.5 mm ²
Max. solid connection terminals	10 mm ²
Max. finely stranded connection terminals	6 mm ²
Min. auxiliary contact connection terminals	0,75 mm ²
Max. AUXCON con. cr.-sec solid	2.5 mm ²
Max. auxiliary contact connection cross section, finely stranded	1.5 mm ²

8510/122-06-601-00 Art. No. 165531

Mechanical Data

Type of connection cable	Solid Finely stranded
Width	70 mm
Height	130 mm
Depth	168 mm
Weight	1.47 kg
Weight	3.24 lb

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

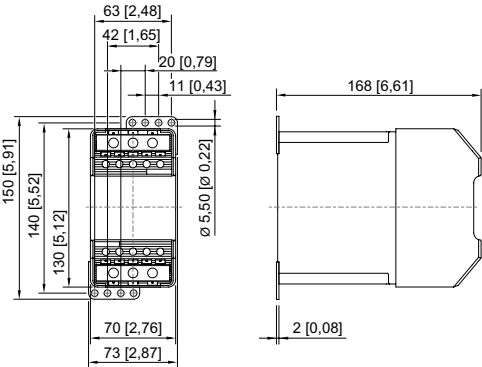

8510/122

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.