

Remote I/O

Remote I/O IS1+ Digital output module

for Zone 1 Ex i

9475/32-04-72 Art. No. 218063



- 4 channels for Ex i hydraulic and solenoid valves up to 95 mA
- Ex ib outputs with line fault monitoring, an LED fault and status display for each channel and SIL2 shutdown input
- Modules in Zone 1 can be replaced without having to disconnect the power supply (i.e. hot-swapped)

MY R. STAHL 9475F



The 9475/32-04-72 digital output modules for Zone 1 have four channels for actuating Ex i hydraulic and solenoid valves or indicator lamps. An additional Ex i control input is suitable for safe shutdown up to SIL 2. All outputs are short-circuit proof, galvanically separated from the system and individually monitored to check for wire breakage/short-circuiting.

Technical Data

Explosion Protection	
Application range (zones)	1, 2
Ex interface zone	1, 2, 21, 22
IECEX gas certificate	IECEX DEK 12.0070X
IECEX gas explosion protection	Ex ia [ib Gb] IIC T4 Gb
IECEX dust certificate	IECEX DEK 12.0070X
IECEX dust explosion protection	[Ex ib Db] IIIC
ATEX gas certificate	DEKRA 12 ATEX0232X
ATEX gas explosion protection	II 2 (2) G Ex ia [ib Gb] IIC T4 Gb
ATEX dust certificate	DEKRA 12 ATEX0232X
ATEX dust explosion protection	II (2) D [Ex ib Db] IIIC
FMus certificate	FM17US0332X
cFM certificate	FM16CA0134X
Marking cFMus	IS, Class I, Div. 2, Groups A,B,C,D; Class I, Zone 1, AEx/Ex ia [ib] IIC NIFW Class I,II,III, Div. 2, Groups A,B,C,D,E,F,G; T4 at Ta = 75°C See Doc. 9475 6 031 005 1
Certificates	ATEX (DEK), Brazil (ULB), Canada (FM), China (NEPSI), IECEX (DEK), India (PESO), Korea (KTL), SIL (exida), USA (FM)
Ship approval	ABS, BVIS, EU RO MR (DNV), KR, LR
Declaration of conformity	ATEX (EUK), China (CCC)
Installation	Zone 1, Zone 2 and safe areas
Further information	See relevant certificate and operating instructions

Safety Data

Max. voltage U_o	15.4 V
Max. current I_o (Ex ia)	0 mA
Max. power P_o (Ex ia)	0 mW
Max. current I_o (Ex ib)	115.4 mA

Safety Data

Max. power P _o (Ex ib)		1475 mW						
Internal inductance		Negligible						
Max. internal capacitance C _i		33 nF (in the following tables, C _i has been subtracted from C _o)						
Max. connectable inductance L _o /capacitance C _o								
	IIC							
	L _o [mH]	0.11	0.1	0.05	0.02	0.01		
	C _o [nF]	257	267	337	477	488		
		for ≤ 700 m conductor (≤ 1 μH/m; ≤ 200 pF/m; 10.76 mOhm/m)						
	L _o [mH]	0.05						
	C _o [nF]	217						
IIB/IIIC	L _o [mH]	2.9	2.0	1.0	0.5	0.05	0.02	
	C _o [nF]	1467	1767	2367	2667	2767	3157	
		for ≤ 2000 m conductor (≤ 1 μH/m; ≤ 200 pF/m; 10.76 mOhm/m)						
	L _o [mH]	2.0	1.0	0.5	0.002			
	C _o [nF]	1667	2367	2667	3967			
Ex i control input "Plant STOP"								
Connection terminals		X3 1, 2 (without galvanic separation, compatible with 9575/22)					X3 3, 4 (with galvanic separation, switchable in parallel)	
Type of protection		Ex ia					Ex ia	
Max. voltage U _o		5.1 V					--	
Max. current I _o		0.44 mA					--	
Max. power P _o		0.5 mW					--	
Max. connectable inductance L _o /capacitance C _o								
IIC	L _o [mH]	100	10	2	1	0.2	0.01	--
	C _o [nF]	2.195	2.595	3.295	3.695	5.495	15.995	
IIB/IIIC	L _o [mH]	100	10	2	1	0.2	0.01	--
	C _o [nF]	9.995	12.995	16.995	19.995	31.995		
Max. voltage U _i		--					30 V	
Max. internal resistance R _i		--					4940 Ω	
Max. internal capacitance C _i		5.2 nF (in the tables above, C _i has been subtracted from C _o)					Negligible	
Max. internal inductance L _i		Negligible					Negligible	

Electrical Data

Number of channels	4 (3) Ex i inputs (depends on nominal output current)						
Connection Ex i field signals	Pluggable, blue terminals, 16-pin, 2.5 mm ² , screw type or cage clamp version with lock						
Connection Ex i Steuereingang	Pluggable, blue terminals, 2-pin, 2.5 mm ² , screw type version with lock						

Remote I/O

Remote I/O IS1+ Digital output module

for Zone 1 Ex i

9475/32-04-72 Art. No. 218063

STAHL

Ex i X3 control input Connection terminals		X3 1, 2 (without galvanic separation, compatible with 9575/22)	X3 3, 4 (with galvanic separation, switchable in parallel)
	Supply voltage	3.3 V	--
	Internal resistance	20.5 kΩ	--
	Control voltage for all outputs "OFF" ("Plant STOP" activated)	> 2.2 V	< 1 V
	"Normal operation" ("Plant STOP" deactivated)	< 0.7 V	> 6 V

Auxiliary Power

Power supply connection	BusRail types 9494
Auxiliary power version	Intrinsically safe Ex ia via BusRail
Behaviour during undervoltage	All outputs "OFF"
Current consumption	250 mA
Max. power consumption	6 W
Max. power dissipation outputs	5.8 W
Max. power dissipation rated operational current	3.4 W

Galvanic Isolation

Test voltage for galvanic separation	Acc. to standard EN 60079-11
Auxiliary power/system components	≥ 1500 V AC
I/O module / I/O module	≥ 500 V AC
I/O channels/system components	≥ 500 V AC
I/O channels / ground (PA)	≥ 500 V AC
I/O channels/plant STOP X3 3,4	≥ 500 V AC
Plant STOP X3 3,4/earth (PA)	≥ 500 V AC


Input

Control input	Ex i control input X3
Control input suitability	Shutdown up to SIL 2, low demand (IEC 61508)
Control input function	"Plant STOP" for switching off all outputs

Output

Ex i output rated operation	12.3 V/75 mA 11.7 V/95 mA
Internal resistance of outputs	23.2 Ω
Open-circuit voltage U_o	13.8 V

9475/32-04-72 output characteristic

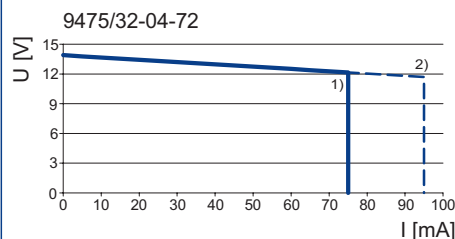

- ¹⁾ 4 channels
²⁾ Max. 3 channels

Note: During operation with four outputs and a total current > 320 mA, output 4 is pulsed. Reduce the load current to < 320 mA.

Remote I/O

Remote I/O IS1+ Digital output module

for Zone 1 Ex i

9475/32-04-72 Art. No. 218063

STAHL

Device Specific Data

Diagnostics message module	ON OFF
Line fault monitoring	OFF ON ON without test current
Test current signal	0,54 ... 0,66 mA
Output behaviour in case of error	OFF ON Keep last value
LED module requires maintenance	"M/S" LED, blue
LED operating conditions	"RUN" LED, green
LED channel error	LED for each channel, red
LED channel status	LED per channel, yellow
"Plant STOP" LED	"Plant STOP" LED, yellow (all outputs are high-impedance)
Retrievable parameters	Type Software revision Hardware revision Manufacturer Serial number
Signal status bit	"1" = Output supplied with power "0" = High-impedance output
Wire breakage output	> 1 k Ω (response range 1 to 5 k Ω) (when the test current is deactivated, can only be detected if the output is switched on)
Short circuit output	< 30 Ω (response range 30 to 70 Ω) (can be detected only if the output is switched on)

Diagnostics

LED group error	"ERR" LED, red
-----------------	----------------

Ambient Conditions

Ambient temperature	-40°C ... +75°C
Ambient temperature	-40°F ... +167°F
Storage temperature	-40°C ... +80°C
Storage temperature	-40°F ... +176°F
Max. operating altitude	< 2000 m
Max. relative humidity	95% (without condensation)
Shock (semi-sinusoidal)	(IEC EN 60068-2-27) 15 g (3 shocks per axis and direction)
Vibration (sinusoidal)	(IEC EN 60068-2-6) Frequency range 2 to 13.2 Hz Amplitude 1 mm (peak value) Frequency range 13.2 to 100 Hz Acceleration amplitude 0.7 g
Electromagnetic compatibility	Tested to the following standards and regulations: EN 61326-1 (2006) IEC 61000-4-1 to 61000-4-6, NAMUR NE 21
Note	(observe operating instructions)

Mechanical Data


Degree of protection (IP) (IEC 60529)	IP20
Module enclosure	Polyamide 6GF
Fire resistance (UL 94)	V2
Pollutant class	Corresponds to G3
Width	96.5 mm

Remote I/O
Remote I/O IS1+ Digital output module
for Zone 1 Ex i
9475/32-04-72 Art. No. 218063




Mechanical Data	
Width, inches	3.8 in
Height	67 mm
Length	128 mm
Length in inches	5.04 in
Mounting depth in inches	2.64 in
Weight	275 g
Weight	0.61 lb
Mounting / Installation	
Mounting type	on NS 35/15 DIN rail (DIN EN 60715)
Mounting orientation	Vertical Horizontal

Technical Drawings – Subject to Alterations



9475/32-04-72 output characteristic

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

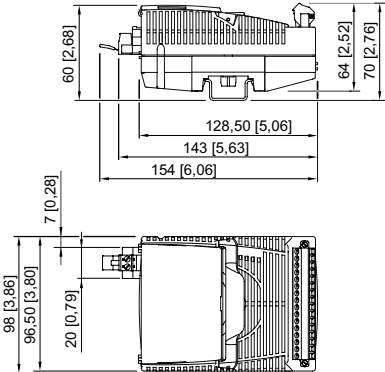

Accessories

Pluggable terminal		Art. No.
	2.5 mm² with lock, 16-pin, screw connector, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits Labelling: 1 to 16 Note: A second terminal is additionally required for I/O module Series 9470 and 9482 Labelling: 17 to 32	162702
	2.5 mm² with lock, 16-pin, spring clamp connection, blue, for connecting the field signals to I/O modules, for intrinsically safe field circuits, incl. test jacks Labelling: 1 to 16 Note: A second terminal is additionally required for I/O module Series 9470 and 9482 Labelling: 17 to 32	162695

Remote I/O

Remote I/O IS1+ Digital output module

for Zone 1 Ex i

9475/32-04-72 Art. No. 218063

STAHL

Partition



For mounting between intrinsically safe and non-intrinsically safe connections between I/O modules to maintain a tight string length of 50 mm

Art. No.

220101

Warning label



"Clean modules only with a damp cloth."

Art. No.

162796

DIN A4 sheet




For label plate on I/O modules; 6 plates per sheet;
IS Wizard printout; packaging unit = 20 sheets

Art. No.

162832

Labelling strips



"FB Addr ... Mod No ..." for pluggable terminal, 26 pieces on the sheet

Art. No.

162788

Vibration bracket set



When installed in environments with extreme vibration (> 0.7 g and max. 4 g), the 9490 vibration brackets may be used as an additional measure and provide mechanical stability for the individual modules.

For mounting: All I/O modules, except 9477/12 and 9478

Number of brackets in a set: 8

Screws (item no. 275516) must be ordered separately.

Art. No.

271920

Set of screws

Set of M5 x 14 screws (self-tapping) for 9490 vibration brackets
Number of screws in a set: 25

Art. No.

275516

Spare Parts

Ex i LED indicator lamp



8010/3-02 LED indicator lamp for intrinsically safe circuits, Ex i

Art. No.

237972

LED indicator lamp for front installation



for Ex i front installation

Art. No.

240901

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.