

EC-910-AFZ-I04-P00 Art. No. 303272



- All-round Full HD zoom camera with 3x zoom
- PoE+, 24 VDC or 24 VAC
- Including wall / ceiling mount bracket
- Zones 1, 2, 21, 22
- Day / night, WDR, ONVIF Q, S and T
- Available without cable or with a 4 m or 10 m long armoured multi-cable

MY R. STAHL EC910AFZA



ONVIF 1.0 2.0 3.0



The EC-910-AFZ PoE+ camera combines state-of-the-art camera technology with Full HD resolution, WDR and zoom function for hazardous areas. The light-sensitive 3x zoom version features an extreme viewing angle of up to 90° (horizontal), making it ideal for monitoring rooms or inspection windows. To ensure guaranteed resistance to adverse weather, the EC-910-AFZ with 3x zoom has been tested and certified by Lloyd's Register for marine application. Lloyd's attests the camera's reliability with regard to temperature, corrosion and vibration resistance as well as EMC. Their design makes the cameras universally applicable in the oil and gas industries and in the chemical, pharmaceutical and related industries. The camera is certified acc. to ATEX, IECEx for Zone 1, 2, 21, 22. Additional certificates available are NEC C1 D2, CEC C1 Z1. The stainless-steel sun-protection and the wall / ceiling mount bracket are part of the standard delivery.

Technical Data

Explosion Protection	
Application range (zones)	1, 2, 21, 22
Certifications	ATEX, IECEx, NEC®, CE Code
IECEX gas certificate	ULD 18.0001X
IECEX gas explosion protection	Ex db IIB T6...T5 Gb
IECEX dust certificate	ULD 18.0001X
IECEX dust explosion protection	Ex tb IIIC T85°C...T100°C Db
ATEX gas certificate	18 ATEX 2001X
ATEX gas explosion protection	Ex II 2 G Ex db IIB T6...T5 Gb
ATEX dust certificate	18 ATEX 2001X
ATEX dust explosion protection	Ex II 2 D Ex tb IIIC T85°C...T100
Electrical Data	
Rated operational voltage AC	24 V
Rated operational voltage DC	24 V
Rated operational current AC	1.32 A
Rated operational current for DC	0.9 A
Power consumption	21 W
Interfaces	TX, PoE+
Connection	Ethernet LAN 100Base-TX, RJ45
Camera Data	
Sensor	1/2" Exmor R CMOS
Day/night camera	Yes

EC-910-AFZ-I04-P00 Art. No. 303272

Camera Data

Lens	f = 3.6 mm (w), 10 mm (d) From F1.5 to F2.7
Viewing angle	88.4° (wide) 40.7° (tele)
Focus	Automatic focus
Zoom	3x (96x digital zoom)
Resolution	Full HD to 320x180 p
Pixel	2.17 megapixels
Minimum working distance	300 mm (wide to tele.)
Min.light. B/W (ICR-ON)	0.1 lx
Minimum illumination B/W (ICR-ON)	0.1 lx IRE 50% 0.002 IRE 50% (slow shutter)
Minimum illumination color (ICR-OFF)	0.15 lx IRE 50% 0.0375lx (1/7.5s) slow shutter IRE 50% (slow shutter)
Number of streams	3 independent video streams Full HD
Frame rate (fps)	1 to 60 frames per second
S/N ratio	50 dB
Back light compensation	Yes
Compression	H.264, MJPEG, JPEG, MPEG4
White balance	Auto, ATW, internal, external External auto, sodium vapour lamp (Fixed, auto), manual
Wide Dynamik Range	On/Off
Motion detection	Yes
Web server	Yes
Special feature	, Wall/ceiling fastening incl.
Number of streams 1	3 independent video streams

Software

Network protocol	ONVIF profiles Q,S,T
Network Configuration	TCP/IPv4-IPv6, UDP/IPv4-IPv6, HTTP, HTTPS, NTP, DHCP, WS- DISCOVERY, DSCP, SOAP, DNS, IGMP (Multicast)
Streaming	RTSP, RTCP, RTP/IPv4-IPv6, HTTP, Multicast

Ambient Conditions


Ambient temperature	-40 °C ... +65 °C
---------------------	-------------------

Mechanical Data

Version	Movable viewing angle
Degree of protection (IP)	IP66, 67, 68, 69
Note on degree of protection	With IP68 (2h, 5m, 16 ft)
Enclosure material	Stainless steel 316L
Surface treatment	Shotblasted + electropolished
Connection cable	without cable
Cable length	0 m
Opening for cable gland	1 x 1/2" NPT
Integrated wiper	No
Feature	Wall/ceiling fastening incl.
Package weight	8 kg
Package dimensions	325 x 190 x 230 mm
Scope of delivery	Sun roof included
Weight	6.5 kg
Weight	14.33 lb

EC-910-AFZ-I04-P00 Art. No. 303272

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

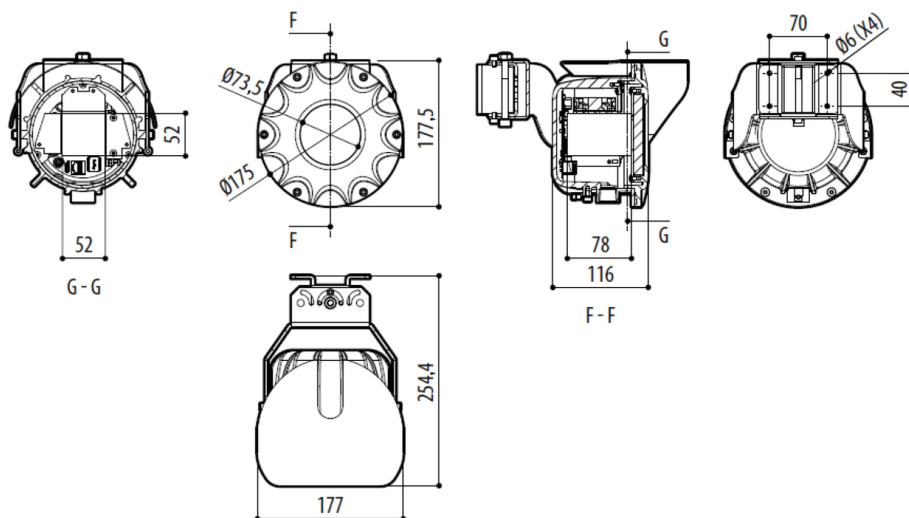


Accessories

Pole and Corner module EC-910		Art. No.
	PCA-EC-910	264965
	Stainless steel 316L, electropolished Payload: 30 kg Pole diameter: 60 mm ... 200 mm Dimension: 120 x 86 mm	
Ex e Terminal box		Art. No.
	JCT-8146-Ethernet+Analog 5xcable glands	265668
	Terminal box, polyester resin Version for ethernet Tx or analog cameras Dimensions without cable glands (HxWxD): 340.5 mm x 340.5 mm x 91 mm Ingress protection: IP66 equipped with: 5 x cable glands: 2 x CMP-25SC2KVAR KLE MsNi M25x1.5 1 x 8161/7-M25-1707 with red stopping plug 2 x 8161/7-M20-1304 with red stopping plug usable for: EC-750, EC-910-AFZ, EC-940S-AFZ (ATEX, IECEx) EC-840S-TIC (ATEX, IECEx), EC-94x-PTZ, Water tank	

EC-910-AFZ-I04-P00 Art. No. 303272

Camera multi-cable armoured

Art. No.



VB-CAM-MULTI-Ethernet-ARM

1 x Ethernet cable
3 x power supplies 2.5 mm²
7 x data cable 0.34 mm²
-60 °C ... +80 °C
19.2 ±0.5 mm outer diameter
IEC 60332-1 flame-resistant
IEC 60754-2 halogen-free
DIN 60811-404 oil-resistant
NEK 606 mud-resistant
Price and weight per m

252571

Cable glands

Art. No.



CMP-20PX2K-REX-MSNi-NPT 1/2" OR-SET

Cable gland with RapidEx compound
explosion-protected
Clamping-range: 12.5 ... 20.9 mm
for EC-910

275571

CMP-20sPX2K-REX KLE MSNi NPT 1/2" OR-SET

Cable gland with RapidEx compound
explosion-protected
Clamping-range: 9.5 ... 15.9 mm
for EC-910

278866

CMP-20sPXSS2K-REX KLE MSNi NPT 1/2" SET

Cable gland with RapidEx compound
explosion-protected
Clamping-range: 6.1 mm ... 11.7 mm
for EC-910

279480

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.