

Control and signalling devices

STAHL

Control device system Series ConSig 8150

LOCAL REMOTE Maintained Selector Switch

8150/5-0176-0116-091-3311-C2435 Art. No. 285442



- Quad certified control stations (NEC®, CE Code, ATEX, IECEx)
- Enclosure made of stainless steel 1.4404 (AISI 316L) for excellent corrosion resistance
- The cover is equipped with a screw-on cover
- Offers a variety of pushbuttons, illuminated pushbuttons, control switches and LEDs for different configurations
- Customizable control stations available upon request with different entry, contact options and additional certifications

MY R. STAHL 8150R



R. STAHL Series 8150 control stations are made of brushed stainless steel 1.4404, AISI 316L and utilizes explosion-protected components for the ultimate flexibility, safety, and durability in hazardous and hostile locations. The high-quality sealing materials make them suitable for an extended temperature range and a circumferential protection channel prevents ingress of water. Choose from one of the standard versions or contact us for a customized solution.

Technical Data

Explosion Protection	
Area of application	European Union (ATEX) Canada IECEx USA
Application range (zones)	1, 2, 21, 22
IECEx gas certificate	IECEx PTB 09.0049
IECEx gas explosion protection	Ex db eb IIC T6 Gb
IECEx dust certificate	PTB 09 ATEX 1109
IECEx dust explosion protection	Ex tb IIIC T80 °C Db
ATEX gas certificate	PTB 09 ATEX 1109
ATEX gas explosion protection	Ex II 2 G Ex db eb IIC T6 Gb
ATEX dust certificate	PTB 09 ATEX 1109
ATEX dust explosion protection	Ex II 2 D Ex tb IIIC T80 °C Db
Certificate ULus	E182378V1S5
Marking ULus	Class I, Div. 2, Groups A,B,C,D Class II, III, Div. 2, Groups F,G Class I, Zone 1, AEx db eb IIC T6 Enclosure Type 3, 4, 4X
Certificate cUL	E182378V1S5
Marking cUL	Ex db eb IIC T6 Class I, Div. 2, Groups A,B,C,D Class II, III, Div. 2, Groups F,G Enclosure Type 3, 4, 4X
Certificates	ATEX (PTB), Canada (UL), IECEx (PTB), USA (UL)

Electrical Data	
Rated operational voltage AC	0 ... 550 V
Rated operational voltage AC UL	600 V
Rated operational current	6 A

Control and signalling devices

STAHL

Control device system Series ConSig 8150

LOCAL REMOTE Maintained Selector Switch

8150/5-0176-0116-091-3311-C2435 Art. No. 285442

Electrical Data

Rated operational current UL	10 A
------------------------------	------

Ambient Conditions

Ambient temperature °C	-50 °C ... 60 °C
------------------------	------------------

Ambient temperature	-58 °F ... +140 °F
---------------------	--------------------

Mechanical Data

Degree of protection (IP)	IP66
---------------------------	------

Degree of protection (IP) UL	IP66
------------------------------	------

Enclosure type (UL50 & UL50E)	3, 4, 4X
-------------------------------	----------

Enclosure material	Stainless steel 1.4404, (AISI 316L), brush finished
--------------------	---

Silicone-free	No
---------------	----

Clamping range AWG	14 AWG
--------------------	--------

Connection cross-section max.	2.5 mm ²
-------------------------------	---------------------

Cover fixing type	With captive screws, M6 stainless steel screws
-------------------	--

Width	116.5 mm
-------	----------

Width, inches	4.587 in
---------------	----------

Height	176.5 mm
--------	----------

Height in inches	6.945 in
------------------	----------

Depth	91 mm
-------	-------

Depth in inches	3.583 in
-----------------	----------

Seal	Silicone, foamed
------	------------------

Weight	2.45 kg
--------	---------

Weight	5.4 lb
--------	--------

Mounting / Installation

Tightening torque of cover screw 1	4.5 N · m
------------------------------------	-----------

Tightening torque of cover screw 1 lbf in	35.4 lbf in
---	-------------

Components

Installation position middle	Small handle, LOCAL-REMOTE (1x 90°), With silicone seal
------------------------------	---

Built-in element middle	Contact element NC/NO
-------------------------	-----------------------

Flange and plates	Without flange
-------------------	----------------



Entry type	CMP adaptor
------------	-------------

Entry 1	1 x CMP-737D M25-NPT 3/4" 737DM3T25
---------	--

Entry 1 type	Metal adaptor
--------------	---------------

Metal entry possible for entry 1	Yes
----------------------------------	-----

Technical Drawings – Subject to Alterations



Control and signalling devices




Control device system Series ConSig 8150

LOCAL REMOTE Maintained Selector Switch

8150/5-0176-0116-091-3311-C2435 Art. No. 285442

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

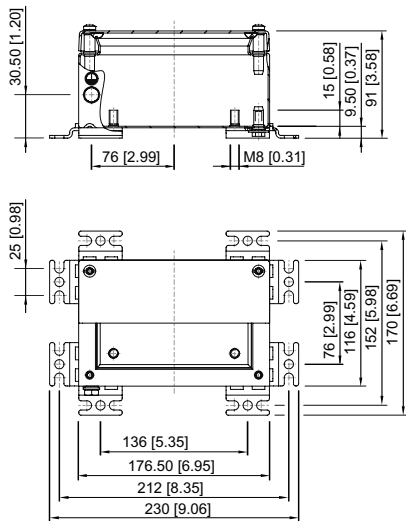

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.