

Network and Wireless Solutions

STAHL

Unmanaged switch FX op is / TX SC for Zone 2

Multi-mode/single mode

9721/13-42-74 Art. No. 243429



- For operation of up to four inherently safe fiber optic cables "op is" according to IEC 60079-28
- For 100 Mbit/s Industrial Ethernet
- Transmission range up to 3.1 mi / 5 km (multi-mode) or up to 18.6 mi / 30 km (single-mode)
- Extended temperature range -22 ... +158 °F / -30 ... +70 °C
- Redundant supply
- Installation in Cl. I, Div. 2, Zone 2 or in the safe area

MY R. STAHL 9721B



The 9721 unmanaged switch is designed for linking electrical Ethernet networks (TX) and fiber optic (FX) based networks. The fiber optics are used for operation in hazardous areas of Cl. I, II, III, Div. 1 and Zone 0, 1, 2, 20, 21 and 22 with the type of protection "Ex op is" (IEC/EN 60079-28). Therefore, conventional fiber optic cables can also be used in hazardous areas and may be connected and disconnected during operation (hot swap). The unmanaged switch has 2 TX ports and 4 FX op is ports. Redundant supply can be provided. Compatible with: Remote I/O IS1+, HMI Series ET/MT-xx6-A-FX and ET/MT-4x8, as well as for IP network cameras.

Technical Data

Explosion Protection

Application range (zones)	2
Ex interface zone	0, 1, 2, 20, 21, 22
IECEX gas certificate	IECEX TUR 16.0002 X
IECEX gas explosion protection	Ex ec [op is T6 Ga] IIC T4 Gc
IECEX dust certificate	IECEX TUR 16.0002 X
IECEX dust explosion protection	[Ex op is Da] IIIC
ATEX gas certificate	TÜV 16 ATEX 7742 X
ATEX gas explosion protection	II 3 (1) G Ex ec [op is T6 Ga] IIC T4 Gc
ATEX dust certificate	TÜV 16 ATEX 7742 X
ATEX dust explosion protection	II (1) D [Ex op is Da] IIIC
FMus certificate	FM17US0054X
cFM certificate	FM17CA0030X
Marking cFMus	Class I, Div. 2, Groups A,B,C,D; Class I, Zone 2, AEx/Ex nA [op is] Group IIC T4 Gc Ta = -30 °C to +70 °C See Doc. 9721 6 031 001 1
Certificates	ATEX (TUR), Canada (FM), China (NEPSI), IECEX (TUR), India (PESO), USA (FM)
Ship approval	ABS, BVIS, EU RO MR (DNV), KR, LR
Declaration of conformity	ATEX (EUK), China (CCC)
Installation	Zone 2

Safety Data

Max. FO radiant power	≤ 15 mW
-----------------------	---------

Electrical Data

Transfer rate	10/100 Mbit/s Auto-negotiation
---------------	-----------------------------------

Network and Wireless Solutions

STAHL

Unmanaged switch FX op is / TX SC for Zone 2

Multi-mode/single mode

9721/13-42-74 Art. No. 243429

Electrical Data

Voltage range DC	12 to 30 V DC
Redundant supply	Yes
Interface 1	4 port, 100BASE-FX SM/MM SC
Interface 1 version	EX OP IS
Interface 1 note	1 (SM) and 3 (MM)
FO wavelength	1310 nm
FO fiber type	Multi-mode/single-mode
FO attenuation	0,3 dB/km (SM) 1 dB/km (MM)
FO bandwidth	3.5 ps/nm *km (SM) 800 Mhz * km (MM)
FO connection type	SC plug connector
FO fiber cross-section	9/125 µm [OS1, OS2] (SM) 50/125 µm [min. OM2] (MM)
FO fibre cross-section Note	Alternatively, 62.5/125 µm [OM1] max. 4 km
FO optical budget	16 dB
FO transmission distance	18.6 mi / 30 km [OS1, OS2] 3.1 mi / 5 km [OM3, OM4] 2.8 mi / 4 km [OM1]
Interface 2	2 Port, 100BASE-TX, RJ45
Interface 2 version	standard
Ethernet interface connection	RJ 45 plug connector
Transmission distance	Up to 100 m (Cat5e or better)
Operating mode	Half duplex, Full duplex Auto-MDI(X)

Auxiliary Power

Nominal voltage V_{nom}	24 V DC
Power supply	4-pole screw terminal
Max. current consumption	500 mA
Max. power consumption	6.4 W
Polarity reversal protection	Yes

Ambient Conditions

Ambient temperature °C	-30 °C ... +70 °C
Ambient temperature °F	-22°F ... +158°F
Max. relative humidity	< 95% (no condensation)
Use at the height of	< 2000 m

Mechanical Data

Degree of protection (IP)	IP20
Pollutant class	Corresponds to G3
Enclosure material	Stainless steel, powder-coated
Connection cross section min.	0.08 mm ²
Connection cross-section max.	2.5 mm ²
Stripping length	7 mm
Weight	500 g
Weight	1.1 lb

Mounting / Installation

Mounting type	On 35 mm DIN rail
---------------	-------------------

Network and Wireless Solutions




Unmanaged switch FX op is / TX SC for Zone 2
Multi-mode/single mode
9721/13-42-74 Art. No. 243429

Mounting / Installation

Tightening torque	0.5 N · m
Mounting orientation	any

Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

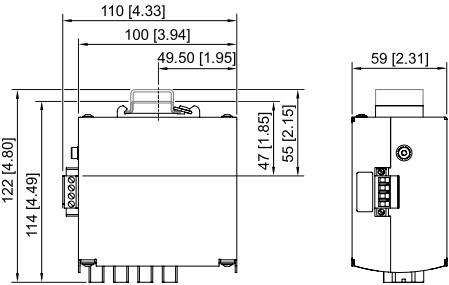

Accessories

FO patch cable		Art. No.
	Patch cable for connection of IS1+ Ethernet CPU 9441 with media converter 9721; plug LC / SC; length 3.8 ft / 3 m	220911

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.