



- State-of-the-art LED technology with high luminous efficacy and long service life
- Extremely high luminaire efficacy
- Can be adjusted from a 1.5 to a 3.0 h rated operating time
- Luminous flux after 100,000 h still 90% of the starting luminous flux
- Optionally with DALI for controlling and monitoring the light fitting
- Automatic weekly functional test and annual rated operating time test

MY R. STAHL 6009D



The emergency luminaire with Series 6009/4 LED with integrated battery can be installed in stand-by switching, continuous mode or in switchable stand-by switching. A weekly functional test and annual rated operating time test are performed automatically. The results are indicated by an LED.

Technical Data

Explosion Protection	
Ex version	Yes
Application range (zones)	1, 2, 21, 22
IECEX gas certificate	IECEX IBE 16.0038
IECEX gas certificate	IECEX IBE 16.0038
IECEX gas explosion protection	Ex db eb ib op is IIC T4 Gb
IECEX dust certificate	IECEX IBE 16.0038
IECEX dust explosion protection	Ex tb op is IIIC T100 °C Db
ATEX gas certificate	IBExU 16 ATEX 1199
ATEX gas certificate	IBExU 16 ATEX 1199
ATEX gas explosion protection	Ex II 2 G Ex db eb ib op is IIC T4 Gb
ATEX dust certificate	IBExU 16 ATEX 1199
ATEX dust explosion protection	Ex II 2 D Ex tb op is IIIC T100 °C Db
Certificates and approvals	ATEX IECEX
Certificates	ATEX (IBE), IECEX (IBE), India (PESO), Polen (CNBOP)
Ship approval	DNV
Declaration of conformity	ATEX (EUK), Declaration of Conformity (AUS)
Electrical Data	
Rated operational voltage AC	100 ... 240 V
Battery version	NiCd battery, gas-tight
Battery operating voltage	6 V
Battery capacity	7 Ah
Self-test function	With (standard)
Frequency range	50 – 60 Hz
Lighting Data	
Number of lamps	1
Lamp wattage	25 W
Lamp	LED

Lighting

Emergency luminaire With LED

GRP

6009/4128-2103-162-2220-22-850011 Art. No. 267868

STAHL

Lighting Data

Light colour	5000 K – neutral white
Light distribution	120°x120° with diffusing glass
Luminaire efficacy	116 lm/W
Luminous flux	2910 lm
Operating time	1.5 / 3h emergency lighting operation
Emergency light output	35% – 3 h 65% – 1.5 h
Colour rendering	≥ 80
Colour temperature	5000 K

Ambient Conditions

Ambient temperature	-30 °C ... +50 °C Note: Through wiring Max. 3x16 A -30 °C ... +55 °C Note: Through wiring 2 Max. 3x10 A
---------------------	--

Mechanical Data

Version	Standard
IP degree of protection (IEC 60598)	IP66/IP67
Enclosure material	Polyester resin, Glass fibre reinforced
Enclosure colour	Light grey (RAL 7035)
Diffuser	With diffuser
Sealing material	Silicone
Silicone-free content	Contains silicone
Translucent cover material	Polycarbonate
Installed terminal strip	PE + N + L1 + L2 + L3 + L´
Max. solid connection terminals	6 mm²
Max. finely stranded connection terminals	4 mm²
Type of connection cable	Finely stranded Solid
Size	2
Width	183.5 mm
Height	125 mm
Length	857 mm
Impact strength (IEC 62262)	IK10
Weight	6.7 kg
Weight	14.77 lb
Disconnection of the luminaire	All-pole disconnection

Components

Threaded plate	2x SS430 stainless steel
Ballast	6046/311-121-010
Through wiring	With 6 conductors 2.5 mm²
Drilled holes	3 x M20
Cable glands and entries	can be ordered as an accessory
Stopping plugs	Can be ordered as accessories
Accessories	without

Lighting


Emergency luminaire With LED

GRP

6009/4128-2103-162-2220-22-850011 Art. No. 267868





Dimensional Drawings (All Dimensions in mm [inches]) – Subject to Alterations

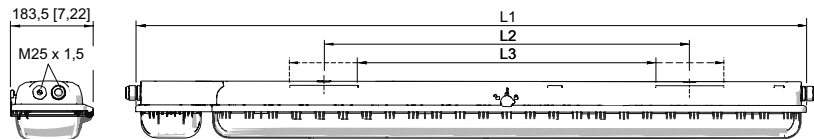


Size 2:
L1 = 857 mm [33.74]
L2 = 400 mm [15.75]
L3 = 320 ... 480 mm [12.60 ... 18.90]


Size 4:
L1 = 1467 mm [57.76]
L2 = 800 mm [31.50]
L3 = 670 ... 930 mm [26.38 ... 36.61]




Ring bolt fitted in insert nut of the luminaire

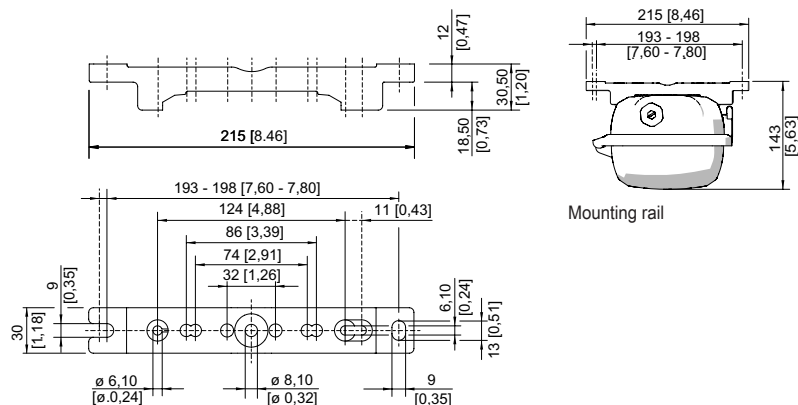


Mounting rail




Pipe clamp fitted in mounting rail




Mounting bracket fitted in mounting rail



A



Wall mounting bracket fitted in mounting rail

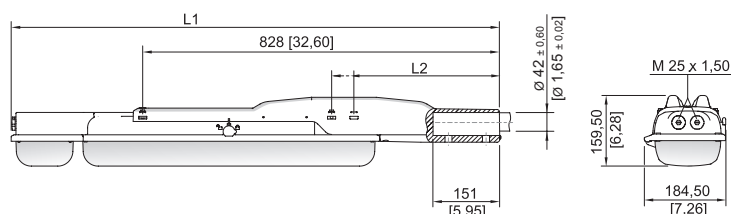

With pole mounting sleeve

Size 2:
L1 = 1133 mm [44.61]
L2 = 390 mm [15.35]

Size 4:
L1 = 1742 mm [68.58]
L2 = 338 mm [13.31]

Accessories

Lighting

Emergency luminaire With LED


GRP

6009/4128-2103-162-2220-22-850011 Art. No. 267868

STAHL


Breather

Art. No.



Thread: M25 x 1.5 (20 pieces); without jam nut

285780



Thread: M25 x 1.5 (1 piece); for installation in light fittings; made from stainless steel; without jam nut

296608

Holder for translucent cover

Art. No.



The fall prevention system for the light fitting cover prevents the light fitting cover from falling accidentally when the light fitting is opened.

226791

Pole mounting sleeve

Art. No.




for the subsequent mounting on lights size 2 and size 4, completely with assembly parts (for pipe diameter 42 mm)

227512

Protection against accidental contact

Art. No.




The protection against accidental contact prevents maintenance technicians and electrical installers from accidentally touching conductive parts. The degree of protection is increased to IP20 when the protection against accidental contact is used.

283153

Box spanner

Art. No.




M8 / A/F 13;
For actuating the central lock

222430

Mounting rail

Art. No.




for a variable mounting distance; 1 pair

222826

Mounting bracket

Art. No.




mounting clamp mounted on a mounting rail for a variable mounting distance; 1 pair

222456

Pipe clamp

Art. No.



R 1 1/2"; with mounting rail for a variable mounting distance; material: stainless steel; 1 pair

222459

R 1 1/4"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair

222458

R 2"; with mounting rail for a variable mounting distance; Material: stainless steel; 1 pair

222460

Lighting

Emergency luminaire With LED

GRP

6009/4128-2103-162-2220-22-850011 Art. No. 267868

STAHL

Ring bolt

Art. No.




M8, direct mounting in insert nuts; 1 pair

115736

Breather

Art. No.




M25 x 1.5 in order to avoid condensate formation

115738

Ceiling and wall mounting bracket

Art. No.




mounted on a mounting rail for a variable mounting distance; Material: stainless steel; Lamp can be swiveled in steps of 15°; 1 pair

222827

Spare Parts

Cover

Art. No.




for luminaire size 2

222427

Contact element

Art. No.




8080/1-3-L 2 NC contact element

132527

Battery set

Art. No.



Battery cover with built-in battery. Gas-tight NiCd battery; 7 Ah / 6 V

223532

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.